


微型引入光缆 (MDIC) Micro Drop Installation Cables

光纤平直放置，光纤两侧平行放置两根KFRP或钢丝加强元件，最后加阻燃外护套。

Optical fibers are placed flat. Two parallel steel wires (or KFRP) are placed at the two sides and the cable is completed with an LSZH outer sheath.

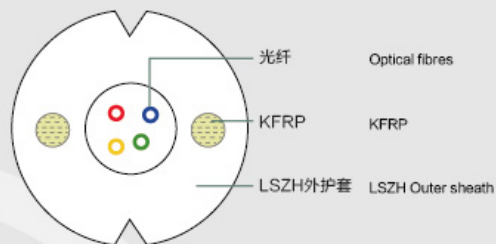

敷设方式 Installation

室内 Indoor

产品特点 Characteristics

1. 光缆外径小，重量轻 Small outer diameter, light weight
2. 光缆具有很高的抗压和抗拉性能，可短距离自承 Excellent tensile and crush performance, self-supporting at short-distance
3. 光缆柔软，弯曲性能好 Excellent bending performance
4. 采用低烟无卤阻燃材料 Used the LSZH material

应用范围 Applications

室内布线直至用户终端 FTTH

温度范围 Temperature Range

存储温度 Transportation	安装温度 Installation	运行温度 In use
-30℃~+70℃	-10℃~+50℃	-30℃~+70℃

规格 Spec	光纤数量 Fibre count	外径 Outer diameter mm	重量 Mass kg/km	最小弯曲半径 Minimum bend radius		允许拉伸力 Tensile strength		允许压扁力 Crush resistance N/10cm
				动态 Dynamic mm	静态 Static mm	短期 short term N		
MDIC(round)	2-6	3.7	13	15D	10D	150	1300	
MDIC(round)	8-12	3.9	15	15D	10D	150	1300	

注：以上参数仅作参考。

Remark: The above datasheets are just for reference.